



# STYLE CNC Machines

The best CNC machines for single pieces and small series

Product overview





Welcome in the world of STYLE




STYLE 350



STYLE 510



STYLE 650 / 750

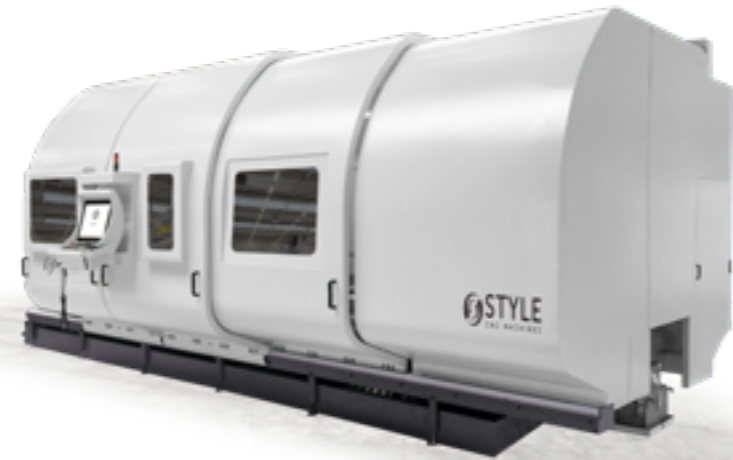

STYLE 1000 ~ 2200

# STYLE CNC Lathes 350 - 2200 series

Machine		STYLE 350	STYLE 510	STYLE 650	STYLE 750	STYLE 1000 ~ 2200
Swing over bed	in	14.96	20.08	25.59	29.53	39.37 ~ 86.61
Swing over support	in	7.48	11.81	16.93	20.87	23.62 ~ 67.72
Distance between centers	in	33.46	53.15 / 72.83 <sup>1</sup>	39.37 / 78.74 / 118.11 / 157.48 / 196.85	39.37 / 78.74 / 118.11 / 157.48 / 196.85	39.37 ~ 472.44
Bed width	in	12.01	12.99	17.72	17.72	22.05 ~ 36.22
Maximum weight between centers	lbs	661	1323 / 1653 <sup>2</sup>	3968	3968 / 5071 <sup>2</sup>	7055 ~ 19842
<b>Main spindle</b>						
Main motor power (S6)	hp	7.4 / 10.1 / 14.8	10.1 / 14.8 / 20.1	29.5 / 34.9 / 49.6	29.5 / 34.9 / 49.6	49.6 / 60.3 / 73.8
Spindle bore	ø in	2.13	3.15 / 4.02	4.13	4.13 / 6.10 / 7.09 / 9.06	5.91 ~ 31.89
Maximum spindle speed	rpm	3000 / 4000	2500 <sup>(3.15)</sup> / 2100 <sup>(4.02)</sup>	2000	2000 <sup>(4.13)</sup> / 1500 <sup>(6.10)</sup> / 1250 <sup>(7.09)</sup> / 1000 <sup>(9.06)</sup>	1200 ~ 120
Spindle taper		D1-6	D1-8	A2-11	A2-11 / A2-15	A2-11 ~ A2-40
<b>X- and Z- axis</b>						
Rapid movement	ipm	315	315	315	315	on request
Feed rate	ipm	79	79	79	79	on request
<b>Tail stock</b>						
Quill	ø in	2.13	2.95 / 3.15 <sup>2</sup>	4.13	4.13 / 4.92 <sup>2</sup>	5.71 ~ 9.25
Quill stroke	in	3.94	6.30	8.86	8.86	7.87
Quill taper	MT	4	5	5	5 / 6	5 / 6
<b>General</b>						
Weight	lbs	4409	5952 / 7165	10692 / 12897 / 15322 / 17747 / 20172	10913 / 13118 / 15543 / 17968 / 20393	on request
Machine dimensions (l/w/h)	in	98.43 x 70.87 x 70.87	125.98 x 70.87 x 70.87 <sup>(53.15)</sup> 145.67 x 70.87 x 70.87 <sup>(72.83)</sup>	129.92 x 90.55 x 86.61 <sup>(39.37)</sup> 169.29 x 90.55 x 86.61 <sup>(78.74)</sup> 208.66 x 90.55 x 86.61 <sup>(118.11)</sup> 248.03 x 90.55 x 86.61 <sup>(157.48)</sup> 287.40 x 90.55 x 86.61 <sup>(196.85)</sup>	129.92 x 90.55 x 86.61 <sup>(39.37)</sup> 169.29 x 90.55 x 86.61 <sup>(78.74)</sup> 208.66 x 90.55 x 86.61 <sup>(118.11)</sup> 248.03 x 90.55 x 86.61 <sup>(157.48)</sup> 287.40 x 90.55 x 86.61 <sup>(196.85)</sup>	on request
<b>Options</b>						
Automatic chip conveyor		option	option	standard	standard	standard <sup>3</sup>
Automatic tool changer		option	option	option	option	option
Positioned C-axis		-	-	option	option	option
Automatic tool changer with driven tools		-	-	option	option	option <sup>4</sup>

<sup>1</sup> With a heavy tail stock dbc becomes 47.24/66.93  
<sup>3</sup> Two standard chip conveyors included

<sup>2</sup> Possible with heavy duty tail stock  
<sup>4</sup> Automatic changer at front of X-support

on request



# STYLE CNC Milling machines

## BT 600 - 4000 series



BT 600



BT 1000



BT 1500 / BT 1500+



BT 2000



BT 3000 / BT 4000



Semi enclosed sheet metal (optional)

Machine		BT 600	BT 1000	BT 1500	BT 1500+	BT 2000	BT 3000	BT 2000L / 2500L	BT 3000L / 4000L
X-axis movement	in	23.62	39.37	59.06	59.06	78.74	118.11	78.74 / 98.43	118.11 / 157.48
Y-axis movement	in	17.72	21.65	25.59	25.59	31.50	31.50	39.37	49.21
Z-axis movement	in	21.65	25.59	23.62	27.56	27.56 <sup>1</sup> / 31.50 <sup>2</sup>	27.56 <sup>1</sup> / 31.50 <sup>2</sup>	35.43	39.37
Bed width	in	14.57	22.83	27.56	27.56	49.21	71.26	on request for any model	
Dimensions work table	in	27.56 x 17.72	55.12 x 16.14	72.83 x 24.02	72.83 x 24.02	86.61 x 23.62	125.98 x 31.50	91.73 x 29.92 111.42 x 29.92	125.98 x 39.37 165.35 x 39.37
Maximum table load	lbs	661	1102	2205	2205	3307 <sup>1</sup> / 4409 <sup>2</sup>	6614	4409 / 4960	6614 / 7716
Height work table	in	31.50	31.89	33.46	33.46	35.43	37.40	35.43	35.43
Distance spindle nose to table	in	4.33 - 25.98	5.91 - 31.50	5.12 - 28.74	3.15 - 30.71	4.72 - 32.28 <sup>1</sup> 8.66 - 40.16 <sup>2</sup>	4.72 - 32.28 <sup>1</sup> 7.09 - 38.58 <sup>2</sup>	3.94 - 43.31	3.94 - 43.31
Distance spindle nose to column	in	21.46	24.02	24.61	25.98	34.65	34.65	36.02	42.52
<b>Main spindle</b>									
Main motor power (S6)	hp	7.4 / 10.1 / 14.8	10.1 / 14.8 / 20.1	10.1 / 14.8 / 20.1	14.8 / 20.1 / 24.8	14.8 / 20.1 / 24.8 / 29.5 / 34.9	29.5 / 34.9 / 49.6 / 60.3	14.8 / 20.1 / 24.8 / 29.5 / 34.9	29.5 / 34.9 / 49.6 / 60.3 / 73.8
Maximum spindle speed	rpm	8000 - 12000	8000 - 12000	8000 - 12000	6000 - 12000	6000 - 12000 <sup>1</sup>	6000 - 12000 <sup>1</sup>	6000 - 12000 <sup>1</sup>	
						6000 - 8000 <sup>2</sup>	6000 - 8000 <sup>2</sup>	6000 - 8000 <sup>2</sup>	
Spindle taper	CAT - SK - BT <sup>3</sup>	40	40	40	40	40 / 50	40 / 50	40 / 50	
<b>X-, Y- and Z- axis</b>									
Rapid movement	ipm	630	315	315	315	315	315	315	
Feed rate	ipm	157	157	157	157	157	157	157	
<b>Tool changer</b>									
Automatic tool changer	#	12 <sup>4</sup> / 16 <sup>5</sup>	24 <sup>6</sup>	24 <sup>6</sup>	24 <sup>6</sup>	24 <sup>6</sup>	24 <sup>6</sup>	24 - 30 <sup>4</sup>	
<b>General</b>									
Weight	lbs	6614	8378	11684	12787	18739 <sup>1</sup> / 27558 <sup>2</sup>	25794 <sup>1</sup> / 30865 <sup>2</sup>	on request for any model	
Machine dimensions (l/w/h)	in	98.43 x 74.80 x 94.49	110.24 x 78.74 x 98.43	122.05 x 90.55 x 98.43	122.05 x 90.55 x 110.24	149.61 x 118.11 x 114.17	291.34 x 122.05 x 114.17	on request for any model	
<b>Options</b>									
Sheet metal		open / semi	open / semi	open / semi	open / semi	open / semi / closed	open / semi / closed	open / closed	
Integrated 4th axis		option	option	option	option	option	option	option	
Coolant through the spindle		MC 750	MC 1000	MC 1500	MC 1500	option	option	option	

<sup>1</sup> Spindle taper 40  
<sup>4</sup> Horizontal

<sup>2</sup> Spindle taper 50  
<sup>5</sup> Vertical

<sup>3</sup> Choose for a CAT, BT or SK spindle taper  
<sup>6</sup> Choice of vertical / horizontal

on request



# STYLE CNC Machining center MC 500 - 2500 series



MC 500



MC 750



MC 1000



MC 1500

Machine		MC 500	MC 750	MC 1000	MC 1500	MC 2000	MC 2500
X-axis movement	in	19.69	29.92	39.37 (59.06)	59.06	78.74	98.43
Y-axis movement	in	14.96	17.32	20.08	26.77	33.46	33.46
Z-axis movement	in	15.75	18.11	20.08	34.65	34.65	34.65
Table size	in	25.59 x 14.96	35.43 x 16.14	42.13 (61.81) x 19.69	66.93 x 23.62	91.73 x 29.92	91.73 x 29.92
Maximum table load	lbs	441	772	1323	2205	3307	3307
Height work table	in	31.69	32.28	35.83	33.86	40.55	40.55
Distance spindle nose to work table	in	5.91 - 21.65	3.94 - 22.05	4.72 - 24.80	3.94 - 38.58	3.94 - 38.58	3.94 - 38.58
Distance spindle nose to column	in	17.13	18.70	24.61	28.35	36.02	36.02
<b>Main spindle</b>							
Main motor power (S6)	hp	5.0 / 7.4 / 10.1	7.4 / 10.1 / 14.8	14.8 / 20.1 / 24.8	14.8 / 20.1 / 24.8	14.8 / 20.1 / 24.8	14.8 / 20.1 / 24.8
Maximum spindle speed	rpm	12000	8000 - 10000	10000 - 12000	10000 - 12000	10000 - 12000	10000 - 12000
Spindle taper	CAT - SK - BT <sup>1</sup>	30	40	40	40	40	40
<b>X-, Y- and Z- axis</b>							
Rapid movement	ipm	945	945	945	945	709	709
Feed rate	ipm	394	394	472	472	472	472
<b>Tool changer</b>							
Automatic tool changer	#	20	16 / 24	20 / 24 / 30	20 / 24 / 30	24 / 30	24 / 30
<b>General</b>							
Weight	lbs	6393	7937	14771 (16094)	19401	on request	on request
Machine dimensions (l/w/h)	in	62.99 x 86.61 x 94.49	86.61 x 90.55 x 118.11	118.11 (157.48) x 102.36 x 102.36	165.35 x 110.24 x 125.98	on request	on request

<sup>1</sup> Choice of CAT, BT or SK spindle taper

Realise excellence,  
experience simplicity



# STYLE CNC Machines

## The best CNC machines for single pieces and small series

### Producer: STYLE CNC Machines BV

Office and letter box post  
Het Steenland 15  
3751 LA Bunschoten  
The Netherlands

Delivery of goods  
Het Steenland 25  
3751 LA Bunschoten  
The Netherlands



STYLE The Netherlands (assembly, service & sales)

### Japan Machine Tools

9553 Clay Road,  
Houston, TX 77080

Phone: 713-939-7263

[sales@japanmachinetools.net](mailto:sales@japanmachinetools.net)



**JAPAN  
MACHINE  
TOOLS, CORP.**

Prices and specifications likely to change without notice

[www.stylecncmachines.com](http://www.stylecncmachines.com) edition: 2024 version: 240103



### Disclaimer

This brochure has been compiled with the utmost care. No rights can be derived from any inaccuracies. Price changes and/or printing errors reserved.

### Intellectual property rights

All data, design, software, etc. contained in this brochure are protected by intellectual property law. No part of this brochure may be copied or reproduced without prior written permission.

